
Shure SM58 XLR Microphone Connector Installation Replacement

This guide will show you how to re-install the XLR microphone connector.

Written By: Ronald Lam

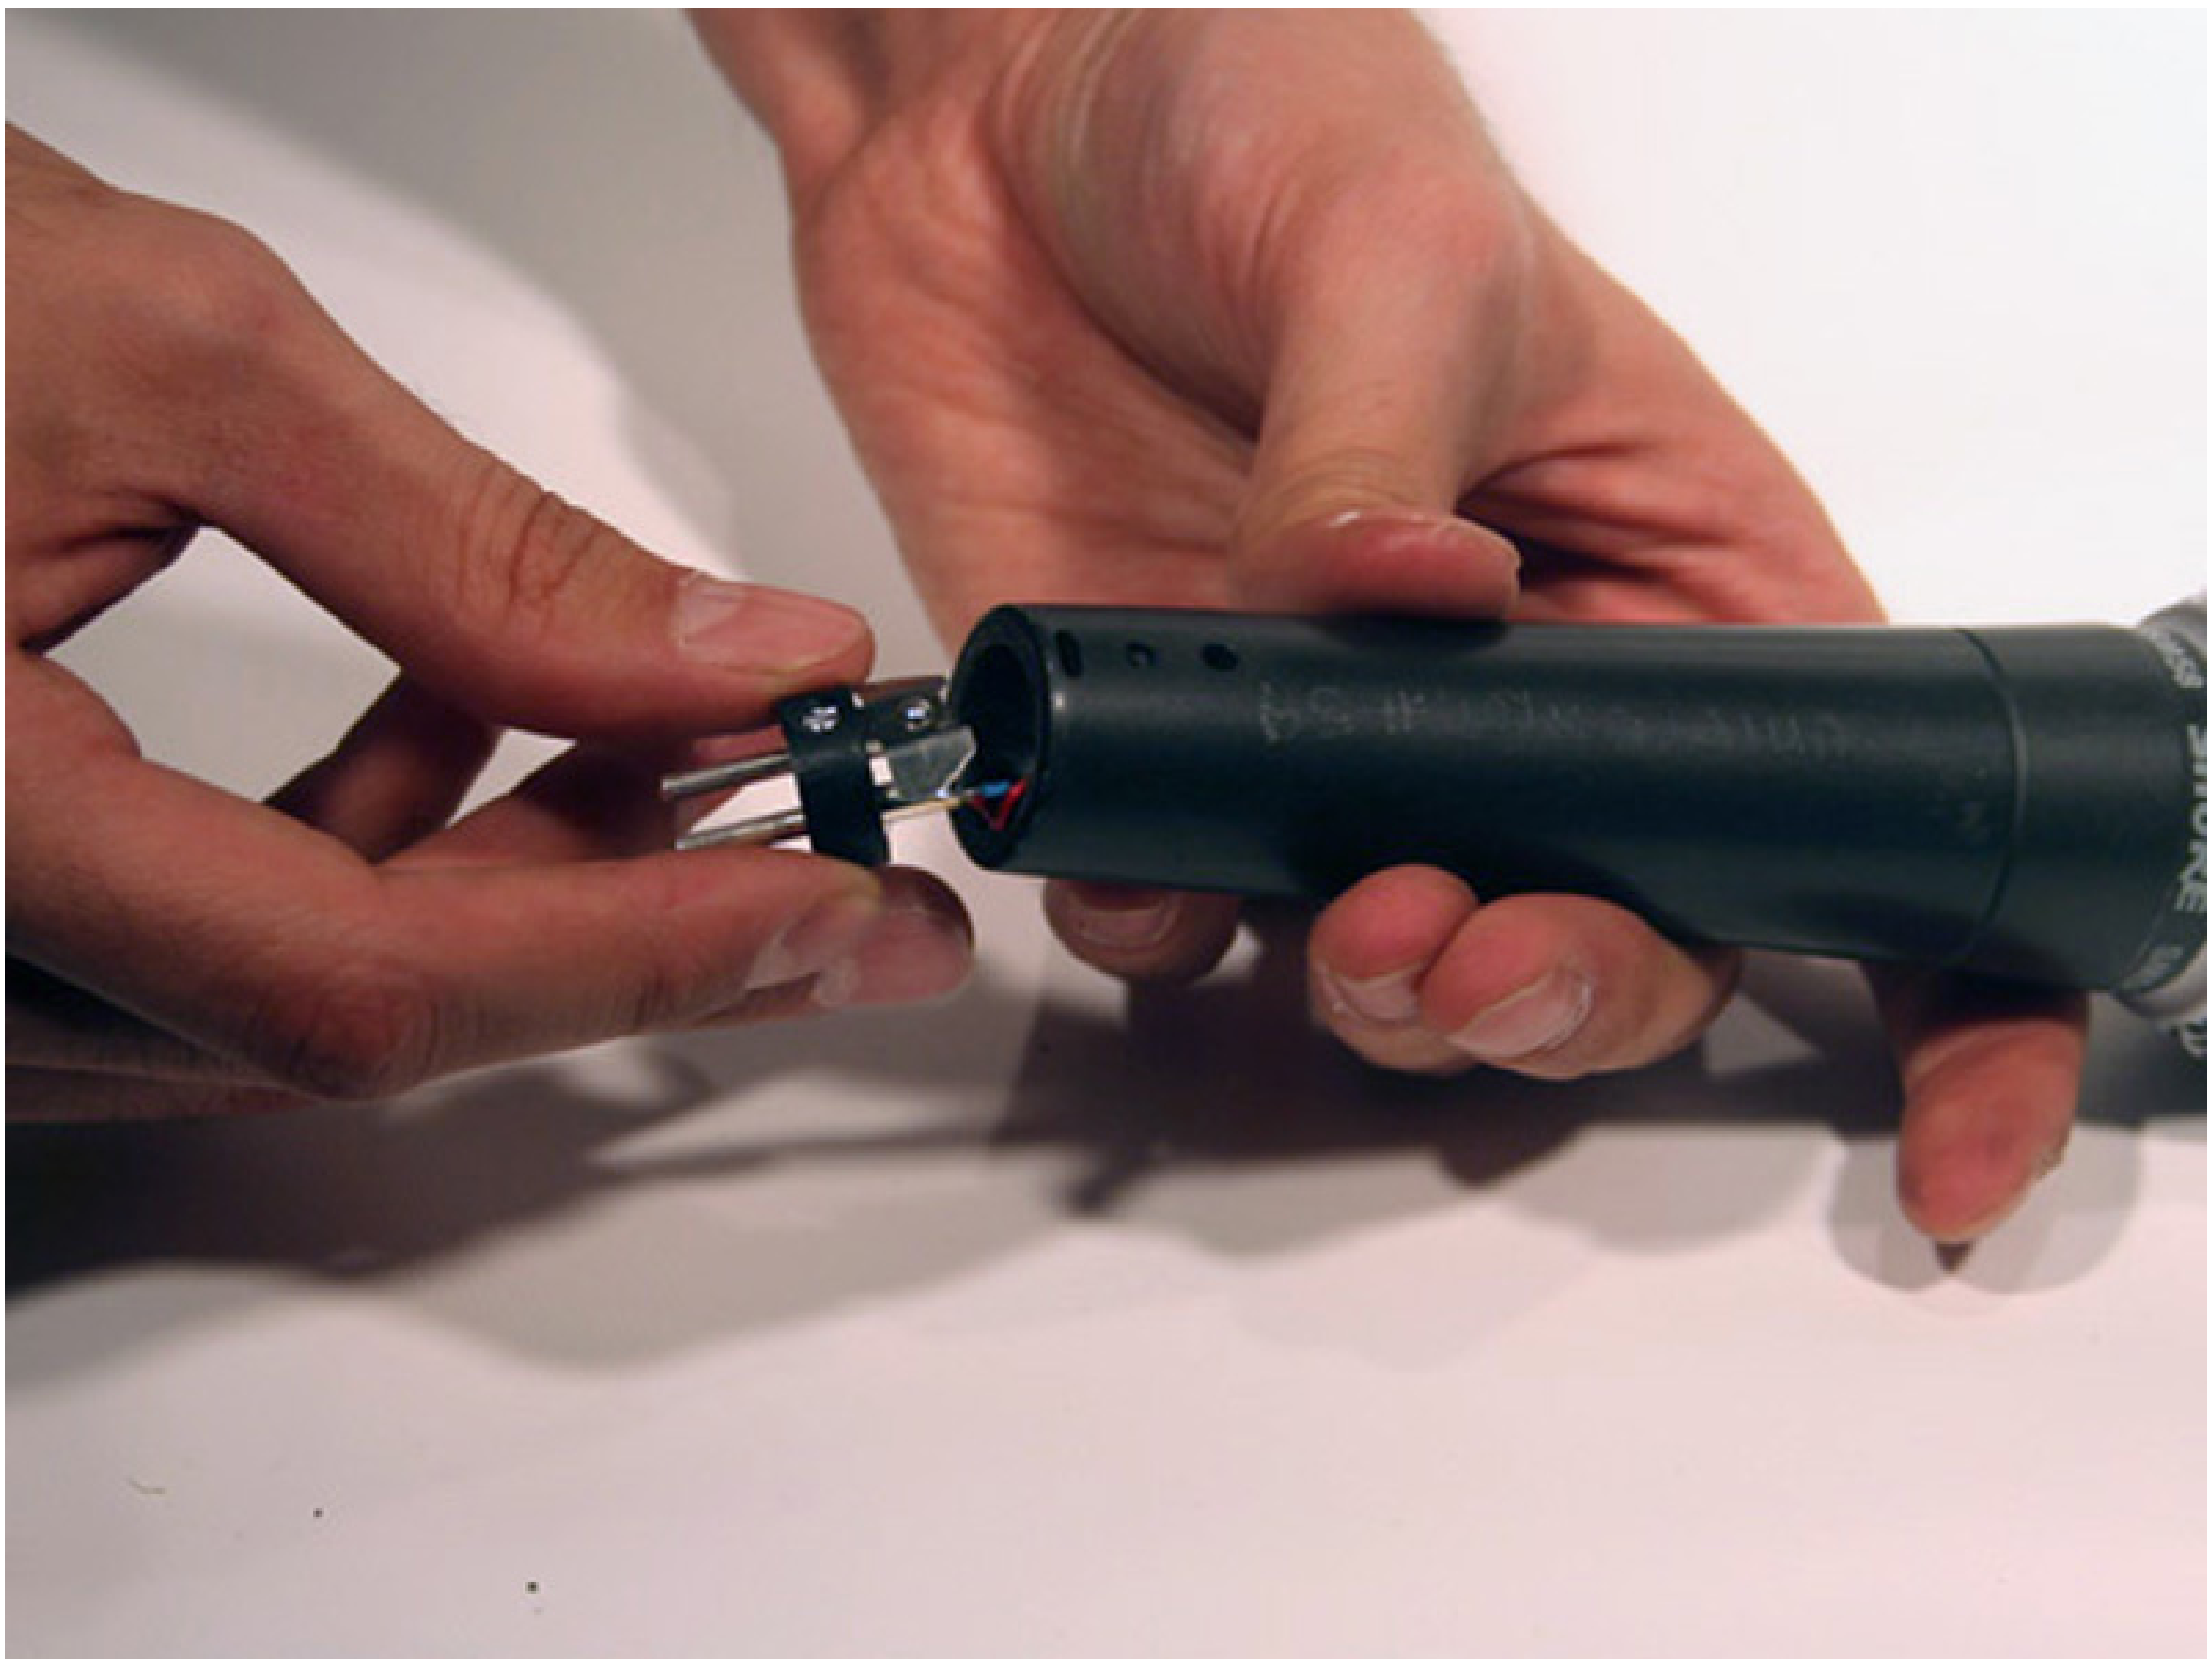


INTRODUCTION

The XLR connector is the point where the XLR cable is inserted into the microphone. The XLR cable then carries the sound to the amplifiers.

TOOLS:


- Flathead 3/32" or 2.5 mm Screwdriver (1)

Step 1 — XLR Microphone Connector Installation

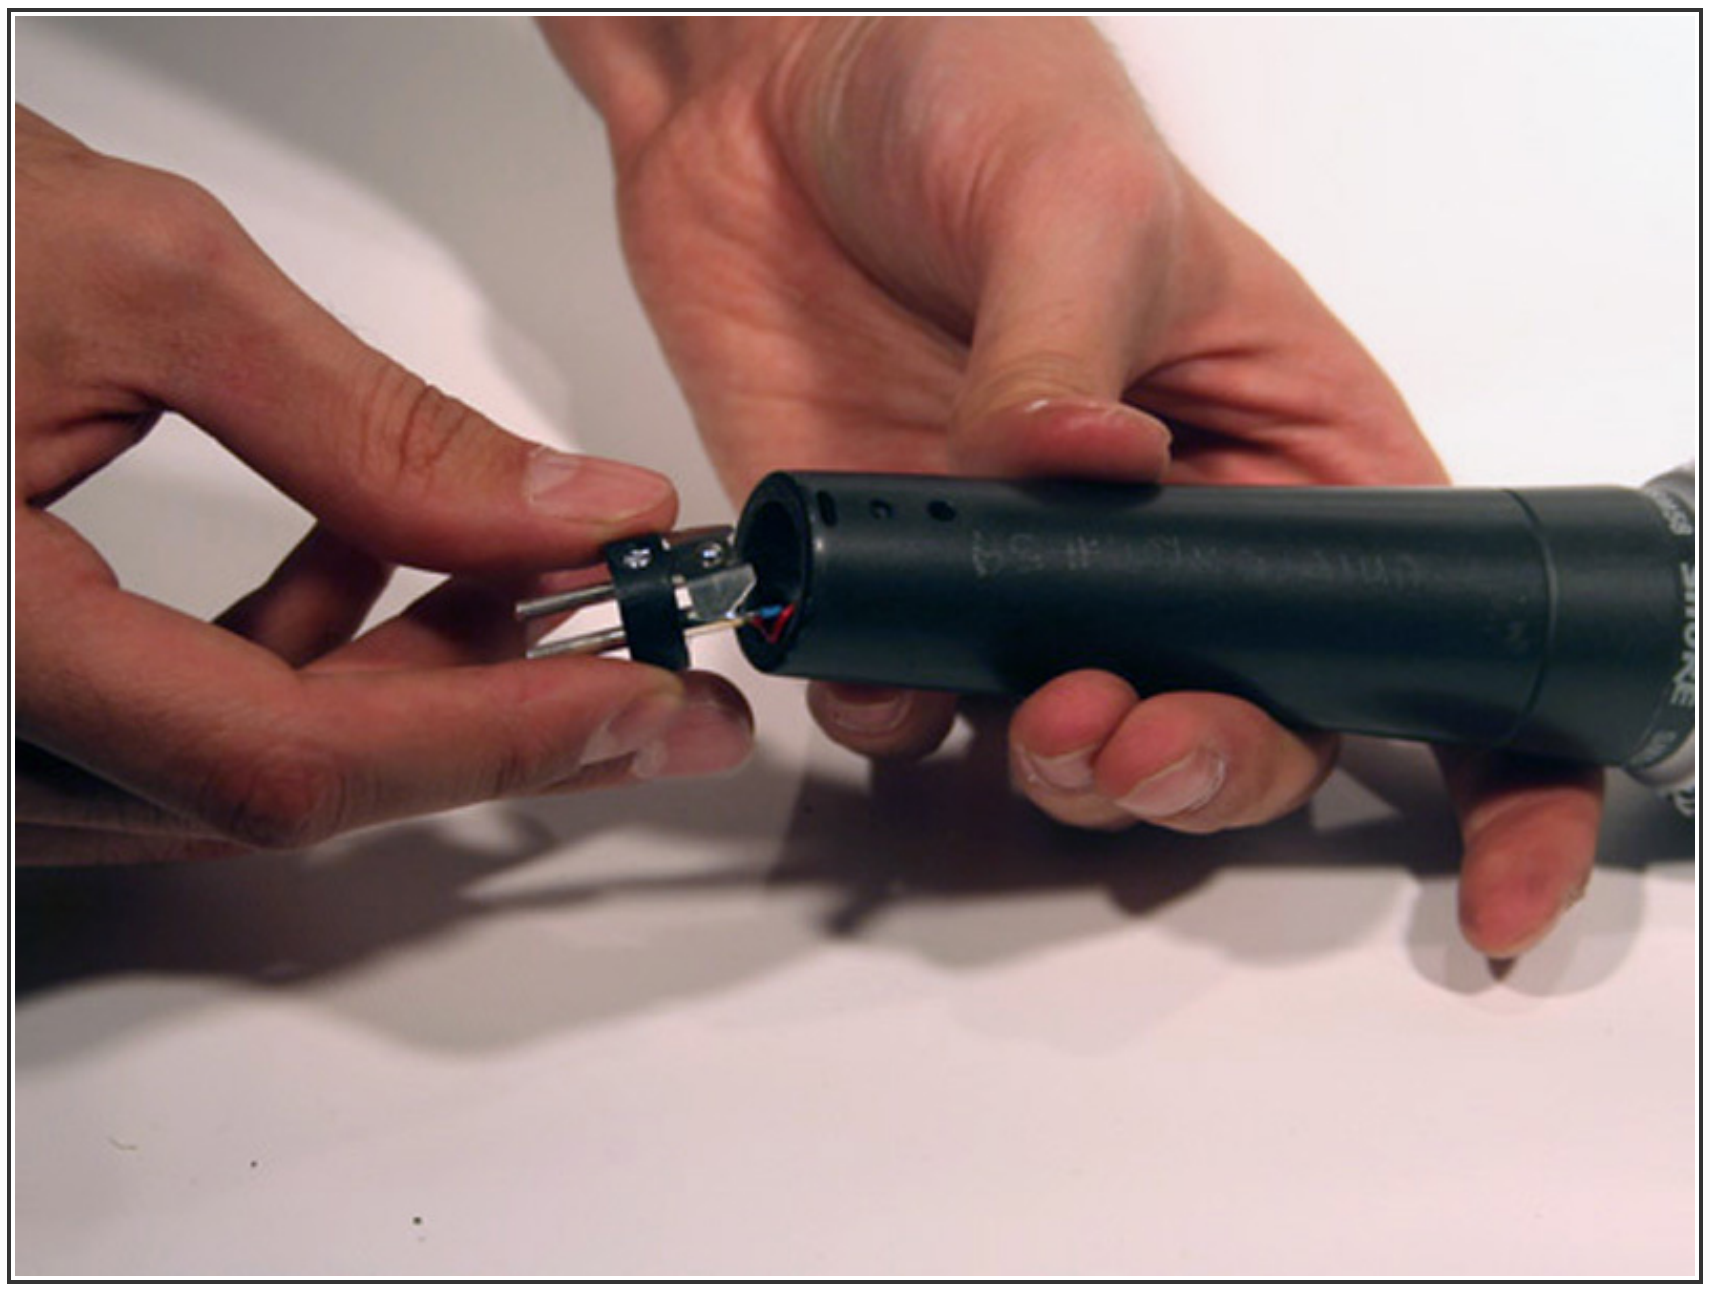

- Holding the microphone connector in one hand and the microphone base in the other, line up the screw in the connector with the hole in the middle of the microphone.
- Also, align the ridge on the microphone connector (located near the top of the connector) with the slot in the base of the microphone.

Step 2

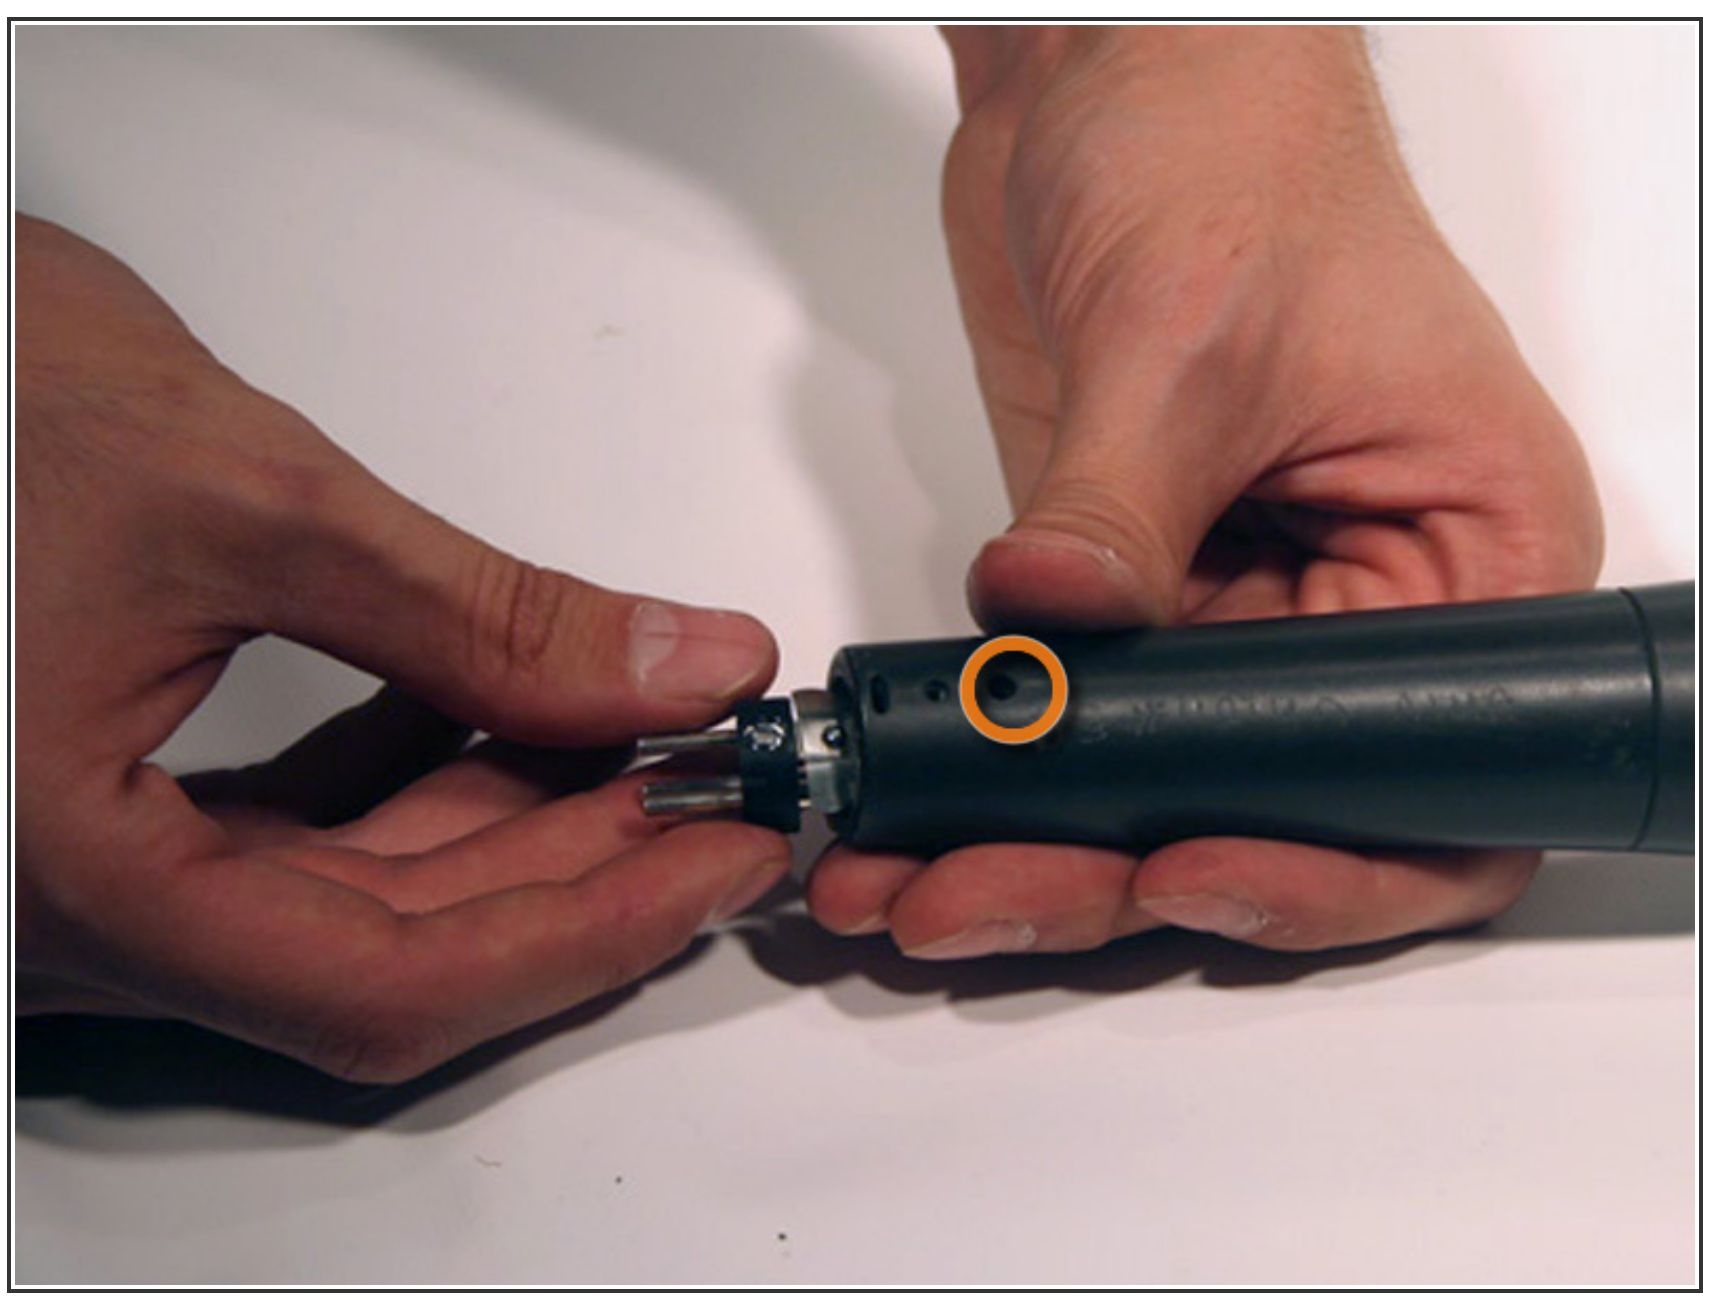

- With those parts aligned, push the connector back into the microphone until the screw lines up with hole in the side of the microphone.
- ⚠ Do not push the microphone past this point or the connector may become stuck.

Step 3



- Using a small flat head screw driver, turn the screw in the side of the microphone clockwise until it is tight.

After installing the connector back into the microphone, it should be ready to connect to any XLR cable.

This document was last generated on 2017-06-21 07:01:54 PM.